




ATLAS[®]-C SUPRA



Performance

- Highly resistant to abrasion and intensive use by professionals
- Very light and flexible hose
- Easy to handle and roll up
- Resistant to pressure thanks to its circular weave construction
- Options for PU and/or synthetic rubber interior lining
- Highly resistant to ozone thanks to its outer coating that also improves abrasion
- Personalised markings with a minimum order
- Available with various international certifications

Uses

- Fire-fighters and Industria.
- Construction.
- Refineries.
- Military.
- Airports.
- Oil tankers and platforms.

Construction

Interior lining:

Special lining made from thermoplastic synthetic materials.

Minimal flow loss thanks to its smooth walls.

Exterior fabric:


Circular weaved outer layer made from high tenacity polyester thread. Flat fabric used as the standard, twill option with a minimum order. No defects (broken threads, knots, etc.)

Exterior permeation:

Red PU-based emulsion as standard (other colours with a minimum order).



ATLAS[®]-C SUPRA

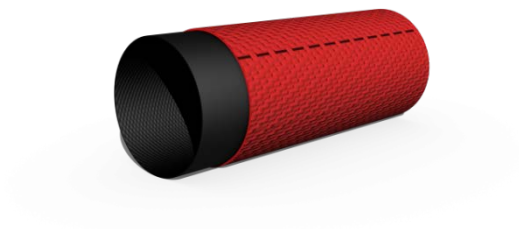

Technical characteristics

DISMETER		WEIGHT	WORKING PRESSURE	TESTING PRESSURE	BREAKAGE PRESSURE
INCHES	MM.	GR/M.	BARS	BARS	BARS
1 ^{3/4} "	45	245	17	34	>50
2 ^{3/4} "	70	460	17	34	>90