

FLEXIGOM[®] PU AQUA


CONSTRUCTION

Interior and exterior layer:

Extruded thermoplastic polyurethane. Minimal flow loss thanks to its smooth interior wall. Blue in colour. Shiny surface without grooves.

Reinforced middle textile:

Circular weaved outer layer made from high tenacity polyester thread. No defects (broken threads, knots, etc.)

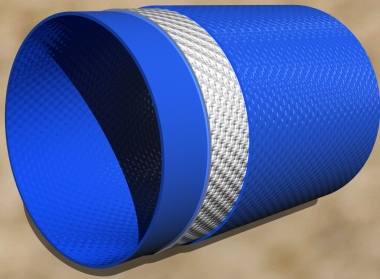

PERFORMANCE

- Excellent resistance to abrasion and intensive use by professionals.
- Highly resistant to oil, gasoline and a wide range of chemicals.
- Very resistant to both contact and radiant heat.
- Light and flexible hose even at low temperatures (-15°C). Easy to handle and roll up.
- Highly resistant to breakage thanks to the specially-made textile.
- No maintenance or drying necessary.

USES

- Agriculture.
- Substitution of rigid well pipes.
- Drinking water transfers and pipe bypasses.
- Civil works.
- Special high-pressure processes.

TECHNICAL CHARACTERISTICS

DIAMETER		COLOR	BREAKAGE PRESSURE	WORKING PRESSURE	WEIGHT	THICKNES		TRACTION	
inches	mm.					inches	mm.	lbs	kg
1½"	32	BLUE	80	27	280	0,087	2,2	5732	2600
2"	51	BLUE	50	17	475	0.090	2,3	8598	3900