

# FLEXIGOM® AIR


## CONSTRUCTION

### Interior and exterior layer:

Specially-formulated highly-visible yellow nitrile rubber, extruded through the circular fabric. Minimal flow loss thanks to its smooth interior wall. Outer grooves to improve resistance to abrasion and ease of use.

### Reinforced middle textile:

Circular weaved outer layer made from high tenacity polyester thread. No defects (broken threads, knots, etc.)

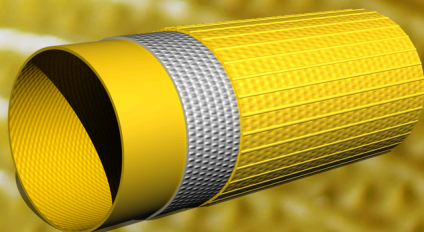

## PERFORMANCE

- Excellent resistance to abrasion and intensive use by professionals.
- Highly resistant to oil, gasoline and a wide range of chemicals.
- Very resistant to both contact and radiant heat.
- Light and flexible hose even at low temperatures (-15°C). Easy to handle and roll up.
- Highly resistant to breakage thanks to the specially-made textile.
- No maintenance or drying necessary.

## APPLICATIONS

- Compressed air.
- 

## TECHNICAL CHARACTERISTICS

DIAMETER		WEIGHT	THICKNESS	WORKING PRESSURE	BURST PRESSURE
inches	mm.	gr/m.	mm.	Bars	Bars
¾"	20	230	2,20	30	>90
1"	25	250	1,95	30	>90
1¼"	32	310	2,00	27	>80
1½"	38	345	1,95	21	>62
1¾"	45	410	1,90	21	>62
2"	52	460	2,00	20	>60
2½"	64	600	2,10	17	>52
2¾"	70	680	2,30	17	>50
3"	75	790	2,50	17	>50